PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:
A61M 5/307

(11) International Publication Number: WO 96/25190

(43) International Publication Date: 22 August 1996 (22.08.96)

(21) International Application Number: PCT/GB96/00340

(22) International Filing Date: 14 February 1996 (14.02.96)

(30) Priority Data:

9502879.1 14 February 1995 (14.02.95) GB PCT/GB95/03016 21 December 1995 (21.12.95) WO (34) Countries for which the regional or international application was filed: AL et al.

(71) Applicant (for all designated States except US): OXFORD BIOSCIENCES LIMITED [GB/GB]; The Magdalen Centre, The Oxford Science Park, Oxford OX4 4GA (GB).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): BELLHOUSE, Brian, John [GB/GB]; The Lodge, North Street, Islip, Oxfordshire OX5 2SQ (GB). BELL, John [GB/GB]; The Dairy, Lower Street, Islip, Oxfordshire OX5 5SG (GB). GREENFORD, John, Christopher [GB/GB]; 11 Park Crescent, Abingdon, Oxfordshire OX14 1DF (GB). SARPHIE, David, Francis [US/GB]; 78 Hailey Road, Witney, Oxfordshire OX8 5SH (GB).
- (74) Agent: GILL JENNINGS & EVERY; Broadgate House, 7 Eldon Street, London EC2M 7LH (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: TRANS-MUCOSAL PARTICLE DELIVERY

(57) Abstract

A needleless syringe comprising an elongate tubular nozzle (7) having a bend (11) part way along its length, a source (8, 21) of particles (P) of a therapeutic agent, and energising means (3) for producing in the nozzle (7) a supersonic condition to cause the particles (P) to be propelled from the nozzle (7) for trans-mucosal delivery of local or systemically-active therapeutic compounds.

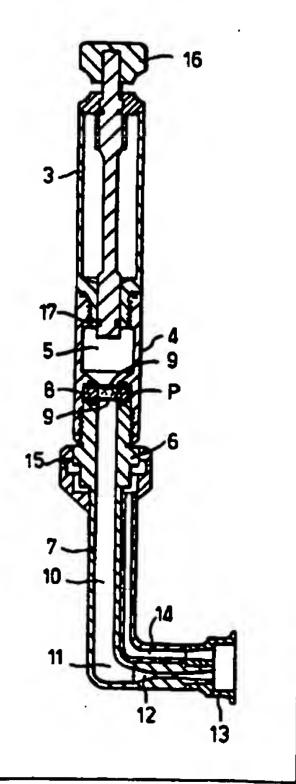

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
	Australia	GN	Guinea	NE	Niger
AU		GR	Greece	NL	Netherlands
BB	Barbados	HU	Hungary	NO	Norway
BE	Belgium	IE	Ireland	NZ	New Zealand
BF	Burkina Faso	ir	Italy	PL	Poland
BG	Bulgaria	JP	Japan	PT	Portugal
BJ	Benin	KE	Kenya	RO	Romania
BR	Brazil	KG	Kyrgystan	RU	Russian Federation
BY	Belarus	KP	Democratic People's Republic	SD	Sudan
CA	Canada	AF	of Korea	SE	Sweden
CF .	Central African Republic	KR	Republic of Korea	SG	Singapore
CG	Congo	KZ	Kazakhstan	SI	Slovenia
CH	Switzerland		Liechtenstein	SK	Slovakia
CI	Côte d'Ivoire	IJ		SN	Senegal
CM	Cameroon	LK	Sri Lanka	SZ	Swaziland
CN	China	LR	Liberia	TD	Chad
CS	Czechoslovakia	LT	Lithuania	TÇ	Togo
CZ	Czech Republic	LU	Luxembourg		_
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	Prance	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Vict Nam

5

10

15

20

25

30

35

TRANS-MUCOSAL PARTICLE DELIVERY

In our earlier W094/24263, we disclose a non-invasive drug delivery system involving the use of a needleless syringe which fires particles of a therapeutic agent in controlled doses into body tissue, e.g. through the intact skin, or delivers genetic material into living cells. The syringe described in the earlier application is constructed as an elongate tubular nozzle, a rupturable membrane initially closing the passage through the nozzle adjacent to the upstream end of the nozzle, particles of a therapeutic agent located adjacent to the membrane, and energising means for applying to the upstream side of the membrane a gaseous pressure sufficient to burst the membrane and produce through the nozzle a supersonic gas flow in which the particles are entrained.

As explained in the earlier specification, the particles of the therapeutic agent may be powdered drugs for all kinds of therapeutic use. Similarly the earlier specification explains the parameters of particle size (preferably $10-40~\mu\text{m}$) density (preferably $0.5-2.0~\text{g/cm}^3$), and velocity (preferably 200-2500~m/sec), and momentum density, that is particle momentum divided by particle frontal area, (preferably 4-7~kg/sec/m), which have been found to be appropriate for adequate target penetration. These parameters are unchanged but we have now devised a modification of the particle delivery system.

Syringes of the above type for transdermal delivery of drugs have generally had an elongate shape with a straight nozzle portion terminating in an outlet directed in the axial direction of the nozzle. This is perfectly satisfactory for drug delivery to most external parts of the body. However, this is not universally so. For example, for many dental operations the appropriate sites for delivery of a local anaesthetic such as lignocaine are into the gums or palate close to the teeth. These injections can be very painful and can cause distress both

2

to the dentist and the patient. It would therefore be very desirable to be able to use the new needleless injection system for injections into the palate and other relatively inaccessible sites within the mouth including the cheeks and gums. However it is difficult to position the tip of the previously proposed needleless syringes in the appropriate positions with the axis of the nozzle substantially perpendicular to the mucosal surface.

5

10

15

20

25

30

35

According to the present invention, a needleless syringe comprises an elongate tubular nozzle, which has a bend a part way along its length, and an upstream end of which is, or is arranged to be, connected to a source of gaseous pressure; means for suddenly releasing the gas to create a supersonic condition within the nozzle; and a source of particles of a powdered therapeutic agent which are arranged to be propelled from the downstream end of the nozzle upon the gas release.

The invention also includes a method of delivering a therapeutic agent to an internal mucosal surface such as the gums, cheeks or palate of the mouth, the vagina, the rectum or the nasal or ocular mucosa, the method comprising applying the new syringe using the bend in the nozzle to enable the downstream end of the nozzle to be directed substantially normally to the mucosal surface, and operating the syringe to cause the particles of powdered therapeutic agent to be propelled into the mucosal surface.

It is thus possible to deliver therapeutic agents into the palate, cheeks, gums and other mucosal tissue, for local and systemic applications using the new needleless injection system.

Examples of therapeutic agents which may be delivered in this way include topically active local anaesthetics, such as lignocaine hydrochloride, lignocaine base, ropivacaine hydrochloride, bupivacaine, procaine, prilocaine, tetracaine, etidocaine, benzocaine, cocaine and similar, which may be mixed with epinephrine (adrenaline) to cause vasoconstriction and prolong the anaesthetic

3

effect. Alternatively, the therapeutic agent may be a systemically-active organic or inorganic small molecule, peptide, natural or recombinant protein, vaccine or oligonucleotide such as insulin, growth hormone, glucagon, atropine, alprazolam, calcitonin, desmopressin, 5HT, dihydroergotamine, interleukin, metal ions and similar.

5

10

15

20

25

30

35

The nozzle may be flexible, for example comprising a metal coil, which may be embedded within a pliable material, such that the bend may be adjusted to a desired angle, and is then stable in the adjusted position. This will facilitate application of the downstream end of the nozzle to various inaccessible parts of the patient's mouth or other mucosal cavities.

The release means may comprise a rupturable membrane which initially closes the passageway through the nozzle; and a valve for releasing gas from the source into a chamber behind the membrane until the membrane ruptures. Alternatively, the release means may be a fast self opening valve having a closure element which is initially held in a closed position, and means for releasing the element whereupon the element moves to an open position under the pressure of the gas source.

The supersonic condition may be a supersonic gas flow in which the particles are entrained, as described more fully in WO 94/24263. However, if the supersonic flow is created upstream of the bend it has been found that the flow may have difficulty in passing around the bend without suffering inacceptable deceleration. To counteract this, it is proposed that the part of the nozzle downstream of the bend is narrower than the part upstream of the bend so that the gas flow is accelerated to supersonic speed only after the gas has travelled around the bend.

Surprisingly, we have found that with this construction the gas can pass through the wider upstream portion of the bend at moderate speed, before being rapidly accelerated to a necessary supersonic speed at the narrower portion downstream of the bend. The narrower portion is

4

preferably of convergent/cylindrical or convergent/divergent shape with the convergent portion being of greater conicity than the cylindrical or divergent portion. The means for initiating the gas flow can be positioned as remotely as is convenient from the nozzle outlet, e.g. away from the patient's mouth. The particles of therapeutic agent may be entrained in the gas flow in the upstream portion of the nozzle and accelerated to supersonic speed as they pass through and out of the downstream portion of the nozzle.

The particles to be entrained may be initially located between two rupturable diaphragms extending across the interior of the nozzle; and if the supersonic flow is initiated by a rupture of a membrane, the rupturable membrane may be provided by one of the diaphragms.

10

15

20

25

30

35

Instead of the particles being entrained within a supersonic gas flow, the arrangement may be such that the downstream end of the nozzle is provided with a bistable diaphragm, which is movable between an inverted position in which it presents outwardly of the nozzle a concavity containing the particles, and an everted, outwardly convex, position, the arrangement being such that a supersonic shockwave, providing the supersonic condition in the nozzle, is arranged to snap the diaphragm over from its inverted to its everted position, and to catapult the particles outwardly, similarly to the technique described in our earlier international patent application No. PCT/GB 95/03016. The advantages of this system, as compared to the particle-entraining supersonic flow system are its quietness, and the fact that, in dental applications, no gas is ejected from the nozzle into the patient's mouth.

Experiments show that the necessary shockwave to evert the diaphragm can be generated upstream of the nozzle bend and have enough energy to round the bend. This enables the shockwave to be generated remote from the patient's mouth and enables the downstream end of the nozzle, which enters the mouth, to be of small size.

The particles in the concavity of the bistable diaphragm may be covered by a thin barrier film which ruptures upon eversion of the diaphragm. The process of releasing the particles without shedding fragments of the barrier film can be aided by scoring, punching, cutting, or providing other lines of weakness in the barrier film. The film may provide the sole means of retaining the particles in the concavity, or it may be provided to maintain sterility, the particles being otherwise immobilised on the diaphragm.

There are a number of ways in which the particles may be initially retained on the everting diaphragm. First, the particles may be retained by a weak adhesive or cohesive agent, which temporarily binds the particles to the concave face of the diaphragm, and possibly also to one another. The eversion process breaks up the weak particle-diaphragm and weak particle-particle bonds. Examples of appropriate adhesive/cohesive agents are water, ethanol, methanol, glycerol, KY jelly, sucrose solution, trehalose solution and albumin solution, and volatile granulation solvents, such as perfluoro alkanes, which are well known in the tabletting art.

Secondly, the particles could be retained on the diaphragm by freezing. The freezing process can be slow, eg using a standard refrigerator, or rapid, using eg liquid nitrogen or dry ice. If the particles are hygroscopic, then the freezing process harnesses the moisture content in order to bond the particles to the diaphragm, and possibly also to each other. If the particles are thawed after freezing, then the adhesion/cohesion can be maintained.

Thirdly, the particles and diaphragm assembly could be placed in a centrifuge so that the centrifugal acceleration forces the particles onto the concave face of the diaphragm. This compaction process "sticks" the particles to the diaphragm and produces an even distribution of particles.

6

These methods of retaining the particles on the diaphragm form independent aspects of the invention and are applicable to all applications of the everting diaphragm technology, as described in earlier PCT/GB 95/03016, and not only when applied to a nozzle having a bend between upstream and downstream portions.

5

10

15

20

25

30

Irrespective of how the supersonic flow or shockwave is produced, in both cases the velocity is increased if the gas which is released into the nozzle is lighter than air, eg helium. The velocity is also increased if the nozzle is initially filled with a gas which is lighter than air, eg helium.

Examples of syringes constructed in accordance with the present invention are illustrated in the accompanying drawings, in which:

Figures 1 to 4 are axial sections of four examples of syringe; and,

Figures 5 and 6 show an evertable diaphragm of the second, third and fourth examples before and after firing, respectively.

The syringe illustrated in Figure 1 has a cylindrical reservoir 3 initially containing helium under a pressure of between 40 and 100, eg about 80, bar. The reservoir, which can be provided as a separate item, is sealed and screwed to a body 4 containing a rupture chamber 5. The body 4 is in turn screwed to a head 6 of a nozzle 7. Sandwiched and sealed between a flange on the body 4 and the end of the head 6 is a sealed capsule 8 consisting of a pair of rupturable membranes 9, spaced at their edges by a ring and containing between them powder particles P of a therapeutic agent, such as lignocaine alone or in an inert carrier. Instead of screw connections, other attachment means, such as bayonet couplings or snap fits may be used.

The nozzle 7 is of right angular shape and incorporates an upper longer, wider passageway 10 upstream of a bend 11, and a shorter narrower convergent/divergent portion 12 projecting laterally from the upstream portion

7

downstream of the bend 11. The nozzle terminates in a soft annular spacer 13 from within which an exhaust passage 14 leads back along the nozzle 7 to exhaust ports 15 in the head 6.

In use helium from the reservoir 3 is released into 5 the rupture chamber 4 upon depression of a plunger 16 and consequential opening of a valve 17. When the pressure in the chamber 5 has built up sufficiently, the membranes 9 are ruptured, releasing a flow of gas through the nozzle 7 with the particles entrained in the flow. The flow passes around the bend 11 and into the narrower portion 12, which has a shorter convergent entry part followed by a short cylindrical part leading to a larger divergent part of lesser angle of conicity than the convergent part. doing so the gas flow is accelerated to supersonic speed of Mach 2 to Mach 8 and the particles are carried by the gas out through the spacer 13, which has previously been placed in contact with the skin, and into the skin. The gaseous shockwave, which is reflected from the skin, passes back through the exhaust passage 14 where its energy is dissipated with minimum noise.

10

15

20

25

30

35

In the Figure 2 example, release of gas into the chamber 5 from the reservoir 3 enables the gas to flow through the passageway 10 in the nozzle so that pressure builds up behind a rupturable membrane 18 (in a downstream portion 19 of the nozzle, which projects laterally at 90° to the axis of the upstream portion of the nozzle. portion 19 contains an evertible bistable diaphragm 20 which is shaped in the form of a dome from a stiff and strong, but resilient, material such as Mylar thermoforming in suitable jig. The diaphragm has a peripheral flange 21. The concavity of the diaphragm initially contained particles P of a therapeutic agent, which are retained to the diaphragm by one of the methods referred to above. A thin barrier film 22 has its edges sealed to the diaphragm. The downstream portion of the syringe is assembled by inserting the membrane 18 into a

8

counterbore in the portion 19, until its edges engage an annular shoulder at the end of the counterbore, inserting a spacer sleeve 23 so that it abuts the edge of the diaphragm, inserting the diaphragm as shown in Figure 5, so that its flange 21 engages the end of the spacer, and securing the three parts in place by screwing into the extreme downstream end of the portion 19 a gland nut 24.

5

10

15

20

25

30

35

In operation, when the gaseous pressure released from the reservoir 3 is sufficient, the membrane 18 ruptures, releasing a shockwave which travels faster than the speed of sound (typically two or three times faster) and which causes the diaphragm 20 suddenly to evert from a downstream concave shape to a downstream convex shape. This causes the barrier film 22 to open and the particles P to be propelled, as shown in Figure 6, at supersonic velocity from the end of the nozzle, in use into the patient's tissue against which the end of the nozzle has previously been placed.

The Figure 3 example differs from the Figure 2 example in that the downstream portion of the nozzle is connected with the upstream portion through a smoothly and curved bend, rather than through an angular bend. diaphragm 18 is now positioned at the upstream end of the upstream portion of the nozzle, at the outlet of the rupture chamber 5, instead of in the downstream portion. The flange of the evertible diaphragm is directly in engagement with the shoulder at the end of the counterbore in the downstream portion of the nozzle and is held in position by a sealing ring and a gland nut 25. This example operates in the same way as that of Figure 2 except that in this case the supersonic shockwave is produced at the upstream end of the nozzle, upon rupture of the membrane 18, and travels along the upstream and downstream portions of the nozzle before causing eversion of the diaphragm 20 and expulsion of the particles P.

The Figure 4 example differs from the Figure 3 example in that there is no rupturable membrane 18. Instead of the

9

valve 17, operated by the plunger 16, the valve stem 26, which carries the valve closure element 17 at its lower end, is connected to the element by a frusto conical portion 27. As there is no equivalent enlargement at the other end of the stem 26, the pressure in the reservoir 3, acting on the portion 27 continually urges the stem 26 downwardly, and hence the element 17 towards its open position. This is initially prevented by a trigger 28, which is pivoted to a head 29 of the reservoir and urged by a leaf spring 30 to rotate in an anti-clockwise direction as seen in Figure 4, so that a tip 31 of the trigger engages an annular groove 32 in the upper part of the stem. When the trigger is depressed, pivoting clockwise as seen in Figure 4, the tip 31 moves out of the groove 32, allowing the stem 26 to move suddenly downwardly under the high pressure in the reservoir 3, releasing the gas from the reservoir into the nozzle 10, and thus producing a supersonic shockwave which travels along the nozzle and everts the diaphragm 20. The downward movement of the stem 26 is limited by engagement of a flange 33, at the upper end of the stem, with the arms of a U-shaped yoke 34, which is insertable through a lateral bore in the head 29, the bore being closed by a screw threaded plug 35.

5

10

15

20

Although not shown, the nozzle in each case may be prefilled with a gas, such as helium, which is lighter than air. In the Figure 1 example, this case may be contained by a peelable or burstable closure foil at the downstream end of the nozzle.

10

CLAIMS

1. A needleless syringe comprising an elongate tubular nozzle, which has a bend a part way along its length, and an upstream end of which is, or is arranged to be, connected to a source of gaseous pressure; means for suddenly releasing the gas to create a supersonic condition within the nozzle; and a source of particles of a powdered therapeutic agent which are arranged to be propelled from the downstream end of the nozzle upon the gas release.

5

10

15

20

- 2. A syringe according to claim 1, wherein the release means comprises a rupturable membrane which initially closes the passageway through the nozzle; and a valve for releasing gas from the source into a chamber behind the membrane until the membrane ruptures.
- 3. A syringe according to claim 1, wherein the release means is a fast self opening valve having a closure element which is initially held in a closed position, and means for releasing the element whereupon the element moves to an open position under the pressure of the gas source.
- 4. A syringe according to any one of the preceding claims, in which the supersonic condition is a supersonic gas flow in which the particles are entrained.
 - 5. A syringe according to claim 4, wherein the part of the nozzle downstream of the bend is narrower than the part upstream of the bend so that the gas flow is accelerated to supersonic speed only after the gas has travelled around the bend.
- 6. A syringe according to claim 5, wherein the narrower part of the nozzle downstream of the bend has a convergent/divergent or convergent/cylindrical shape.

11

7. A syringe according to any one of claims 4 to 6, wherein the particles are initially located between two rupturable diaphragms extending across the interior of the nozzle.

5

- 8. A syringe according to any one of claims 4 to 7, when dependent upon claim 2, wherein the rupturable membrane is provided by one of the diaphragms.
- 9. A syringe according to any one of claims 1 to 3, wherein the downstream end of the nozzle is provided with a bistable diaphragm, which is movable between an inverted position in which it presents outwardly of the nozzle a concavity containing the particles, and an everted, outwardly convex, position, the arrangement being such that a supersonic shockwave, providing the supersonic condition in the nozzle, is arranged to snap the diaphragm over from its inverted to its everted position, and to catapult the particles outwardly.

20

- 10. A syringe according to claim 9, wherein the particles in the concavity are covered by a thin barrier film which ruptures upon eversion of the diaphragm.
- 25 11. A syringe according to claim 9 or claim 10, wherein the particles are initially retained on the everting diaphragm by a weak adhesive or cohesive agent.
- 12. A syringe according to claim 9 or claim 10 wherein the particles are initially retained on the everting diaphragm by freezing or centrifuging.
 - 13. A syringe according to any one of the preceding claims, incorporating, upstream of the nozzle, a reservoir containing the gas source at a pressure of between 40 and 100 bar.

- 14. A syringe according to any one of the preceding claims, in which the pressurised gas is a gas which is lighter than air.
- 5 15. A syringe according to claim 14, wherein the gas is helium.
- 16. A syringe according to any one of the preceding claims, wherein the nozzle initially contains a gas which is lighter than air.
 - 17. A syringe according to claim 16, wherein the gas within the nozzle is helium.
- 18. A syringe according to any one of the preceding claims, wherein the nozzle is flexible so that the bend may be adjusted to a desired angle, and is then stable in the adjusted position.
- 20 19. A syringe according to any one of the preceding claims, wherein the therapeutic agent is a topically active local anaesthetic.
- 20. A syringe according to claim 19, wherein the local anaesthetic is lignocaine hydrochloride, lignocaine base, ropivacaine hydrochloride, bupivacaine, procaine, prilocaine, tetracaine, etidocaine, benzocaine, or cocaine.
- 21. A syringe according to claim 19 or claim 20, wherein the local anaesthetic is mixed with epinephrine (adrenaline) to cause vasoconstriction and prolong the anaesthetic effect.
- 22. A syringe according to any one of claims 1 to 18, wherein the therapeutic agent is a systemically-active organic or inorganic small molecule, peptide, natural or recombinant protein, vaccine or oligonucleotide such as

13

insulin, growth hormone, glucagon, atropine, alprazolam, calcitonin, desmopressin, 5HT, dihydroergotamine, interleukin, or metal ions.


- 5 23. A syringe according to any one of the preceding claims, wherein the particles have a size of between 10 and 40 μm .
- 24. A syringe according to any one of the preceding claims, wherein the particles have a density of between 0.5 and 2.0 g/cm³.
- 25. A syringe according to any one of the preceding claims, in which the particles are propelled from the downstream end of the nozzle at a velocity of between 200 and 2500 m/sec.
- 26. A syringe according to any one of the preceding claims, wherein the momentum density of the particles propelled from the downstream end of the nozzle is between 4 and 7 kg/sec/m.
- 27. A method of delivering a therapeutic agent to a mucosal surface such as the gums, cheeks or palate of the mouth, the vagina, rectum or nasal or ocular mucosa, the method comprising applying a syringe according to any one of the preceding claims, using the bend in the nozzle to enable the downstream end of the nozzle to be directed substantially normally to the mucosal surface, and operating the syringe to cause the particles of powdered therapeutic agent to be propelled into the mucosal surface.
- 28. A method of therapeutic treatment, comprising the trans-mucosal delivery of a particulate agent that provides said therapeutic treatment, which comprises administering the particles to the locus of trans-mucosal administration.


14


- 29. A method according to claim 28, in which the agent has no, or a minor amount by volume of, inert carrier or diluent.
- 30. A method according to claim 28 or claim 29, wherein the particles are administered at a velocity in the range between 500 and 1,500, preferably between 750 and 1,000 m/sec; and/or the particles have a size in the range of between 1 and 50, preferably between 10 and 20 μ m; and/or the density of the particles is in the range of between 0.5 and 2.0, preferably substantially 1.0 g/cm³.
- 31. A method according to any one of claims 28 to 30, in which the therapeutic agent is a topically active local anaesthetic.
 - 32. A syringe according to claim 31, wherein the local anaesthetic is lignocaine hydrochloride, lignocaine base, ropivacaine hydrochloride, bupivacaine, procaine, prilocaine, tetracaine, etidocaine, benzocaine, or cocaine.


20


- 33. A syringe according to claim 31 or claim 32, wherein the local anaesthetic is mixed with epinephrine (adrenaline) to cause vasoconstriction and prolong the anaesthetic effect.
- 34. A syringe according to any one of claims 28 to 30, wherein the therapeutic agent is a systemically-active organic or inorganic small molecule, peptide, natural or recombinant protein, vaccine or oligonucleotide such as insulin, growth hormone, glucagon, atropine, alprazolam, calcitonin, desmopressin, 5HT, dihydroergotamine, interleukin, or metal ions.

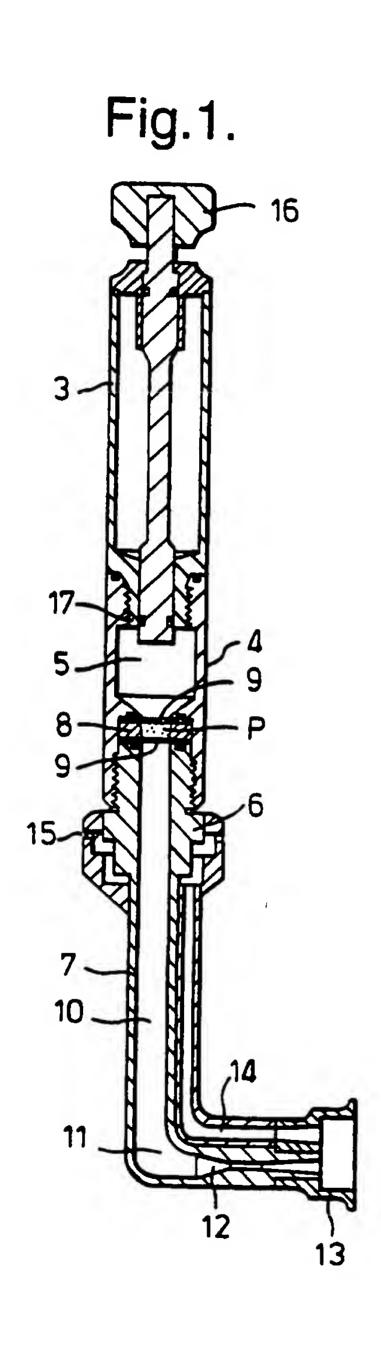


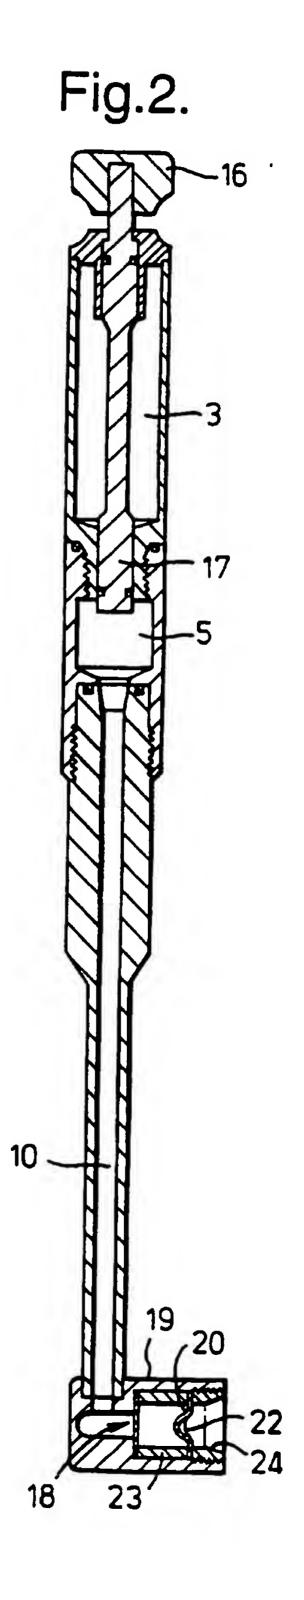

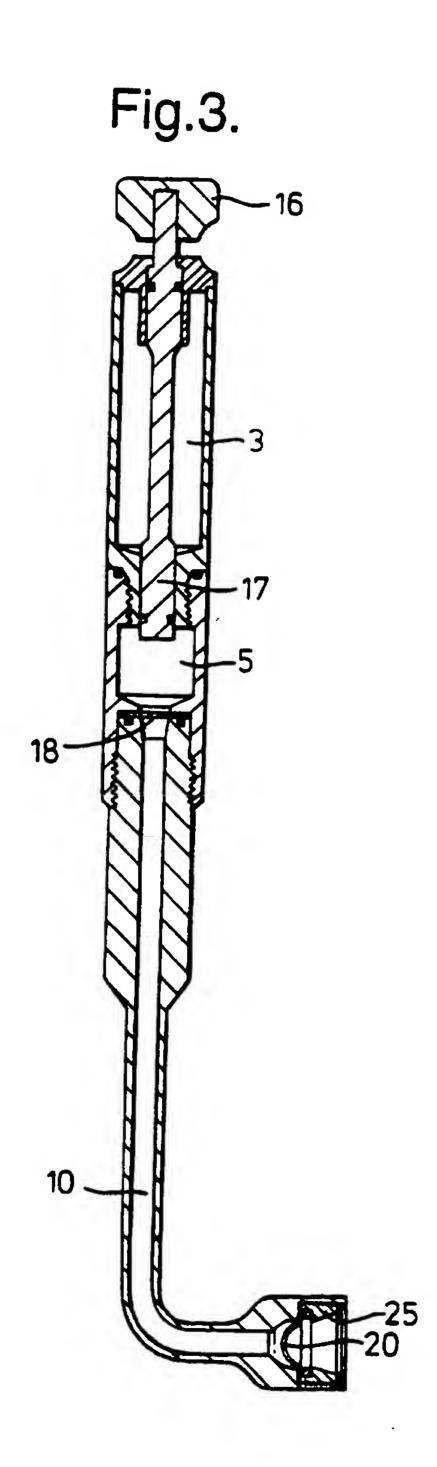

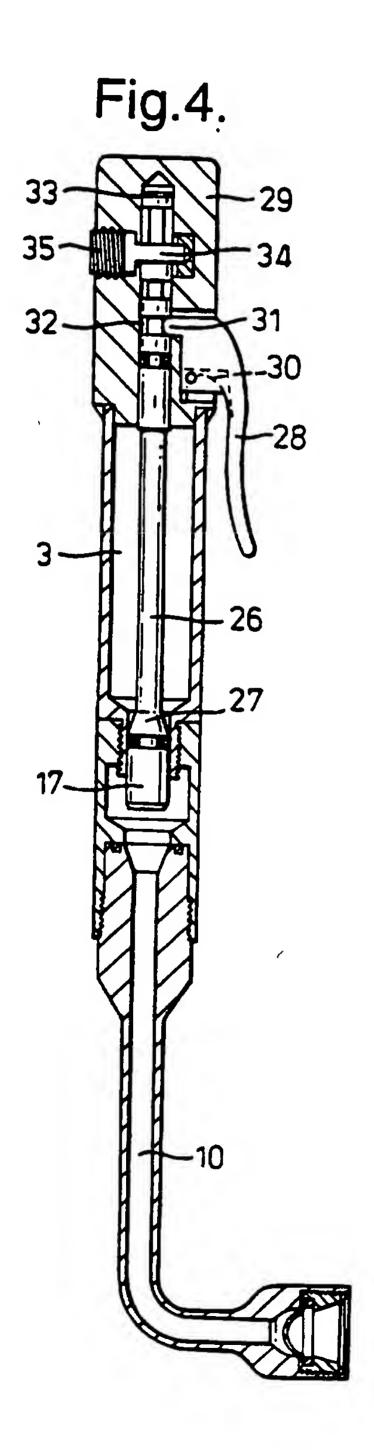

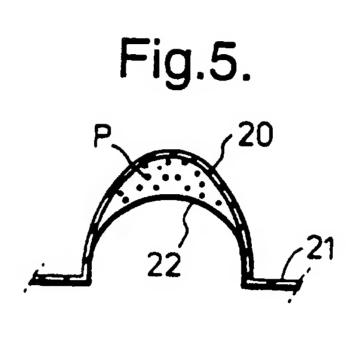

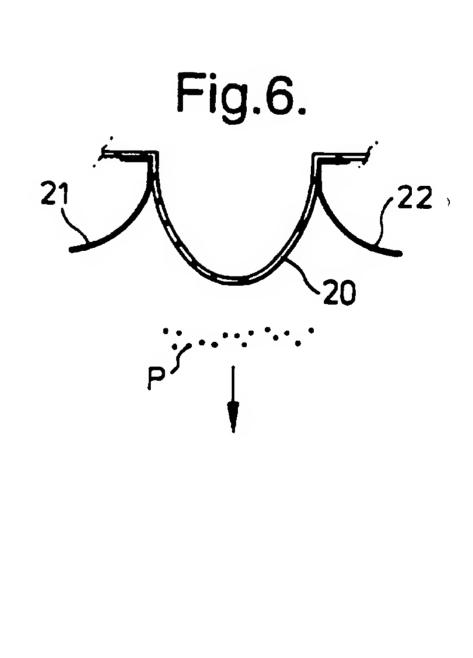

INTERNATIONAL SEARCH REPORT

Intern 1 Application No PCT/GB 96/00340

A. CLAS	SIFICATION OF SUBJECT MATTER		
	61 M 5/307		
1			
	to International Patent Classification (IPC) or to both national cl	assification and IPC6	
	DS SEARCHED		
Minimum	documentation searched (classification system followed by classif	ication symbols)	
	61 M		
Document	ation searched other than minimum documentation to the extent t		
	the committee of the carrier of	the such documents are included in the lields s	carched
Electronic	data base consulted during the international search (name of data	base and, where practical, search terms used)	
	`		
C DOCUM	VENTS CONSIDERED TO THE THE		
	MENTS CONSIDERED TO BE RELEVANT		· · · · · · · · · · · · · · · · · · ·
Category *	Citation of document, with indication, where appropriate, of th	e relevant passages	Relevant to claim No.
· · · · · · · · · · · · · · · · · · ·			
Y	WO 3 04/24 262	į.	
•	WO, A, 94/24 263		1-4,
	(OXFORD BIOSC.)	10.041	7,8,
	27 October 1994 (27	.10.94),	13-17,
	the whole document,]	19,22-
	especially page 4,		31,34
	lines 22-34; page 5	, line 11 -	
	page 6, line 9; page	9 6,	
	lines 20-25; page 7	•	
	lines 13-18; page 8	•	
	lines 17-26		
	(cited in the applic	cation).	
Y	 UC	Ì	
1	US, A, 5 049 125		1-4,
	(CL. ACCARIES et al.		7,8,
1	17 September 1991 (:		13-17,
1	fig. 5, abstract; co		19,22-
ļ	lines 7-20; column	L2,	31,34
•	lines 37-56.		
1			
X Furth	her documents are listed in the continuation of box C.	Patent family members are listed in	
		Patent family members are listed in	Durka.
Special cat	legories of cated documents:	To later document mublished after the inse-	nana di Glima di
'A' docume	ent defining the general state of the art which is not	or priority date and not in conflict with	the application but
CONTRIUC	ared to be of particular relevance	ated to understand the principle or the invention	ory underlying the
filing d	document but published on or after the international	"X" document of particular relevance; the c	laimed invention
L' docume	nt which may throw doubts on priority claim(s) or	cannot be considered novel or cannot be involve an inventive step when the doc	oe considered to
MIRCH I	is cited to establish the publication date of another or other special reason (as specified)	"Y" document of particular relevance; the c	laimed invention
O' docume	ent referring to an oral disclosure, use, exhibition or	cannot be considered to involve an involve a	entive step when the
outer m	RCAN S	ments, such combination being obvious in the art.	
later the	nt published prior to the international filing date but an the priority date claimed	*&* document member of the same patent for	amily
ate of the a	actual completion of the international search	T	
	10 May 1996	Date of mailing of the international sear	
	• • •	n	4. 06. 96
Name and m	alling address of the ISA	Authorized officer	
	European Patent Office, P.B. 5818 Patentiaan 2 NL - 2280 HV Rijswijk	14181474	
	Tel. (+31.70) 340-2040, Tx. 31 651 epo nl.	LUDWIG e.h.	
	Fax: (+ 31-70) 340-3016		

INTERNATIONAL SEARCH REPORT

-2-

Internati 1 Application No
PCT/GB 96/00340

licgory "	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
À	GB, A, 686 344 (BELTON DICK.) 21 January 1953 (21.01.53), the whole document.	1,19, 27,28, 31
		·
,		

ANHANG

zum internationalen Recherchenbericht über die internationale Patentanmeldung Nr.

In diesem Anhang sind die Mitglieder der Patentfamilien der in obenge members relating to the patent documents nannten internationalen Recherchenbericht cited in the above-mentioned interangeführten Patentdokumente angegeben. Diese Angaben dienen nur zur Unter-richtung und erfolgen ohne Gewähr.

ANNEX

to the International Search Report to the International Patent Application No.

au rapport de recherche inter-national relatif à la demande de brevet international n°

ANNEXE

PCT/GB 96/00340 SAE 125666

national search report. The Office is in no may liable for these particulars which are given merely for the purpose of information.

La presente annexe indique les accores de la famille de brevets relatifs aux documents de brevets cités dans le rapport de recherche inter-national visée ci-dessus. Les reseigne-ments fournis sont donnés à titre indicatif et n'engagent pas la responsibilité de l'Office.

le Recherchenbericht Datum der			de l'Office.		
Patent in sea Document dans le ra	s Patentdokument document cited rch report de brevet cité pport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitgliedler) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication	
WO A1	9424263	27-10-94	452988914456792 144518886199905054 344595520555121872 344595520555121872 492462333121872 492462333121872 49246233312100 9999999999999999999999999999999999	08-11-94 -944 -944 -944 -944 -955 -101-99 -999 -9999 -99999 -1012 -999999 -9999999999999999999999999999	
US A	5049125	17-09-91	984422129667799997345944221299953 7316944540993299953 7316991932206538853 713 7223206677999 713 713 713 713 713 713 713 713 713 713	15-04-98 15-04-98 15-02-98 15-02-98 16-02-98 16-02-98 16-10-	
GB A	_686344		,	. en	